


ZIEGLER Delta Digital Multifunction Instrument

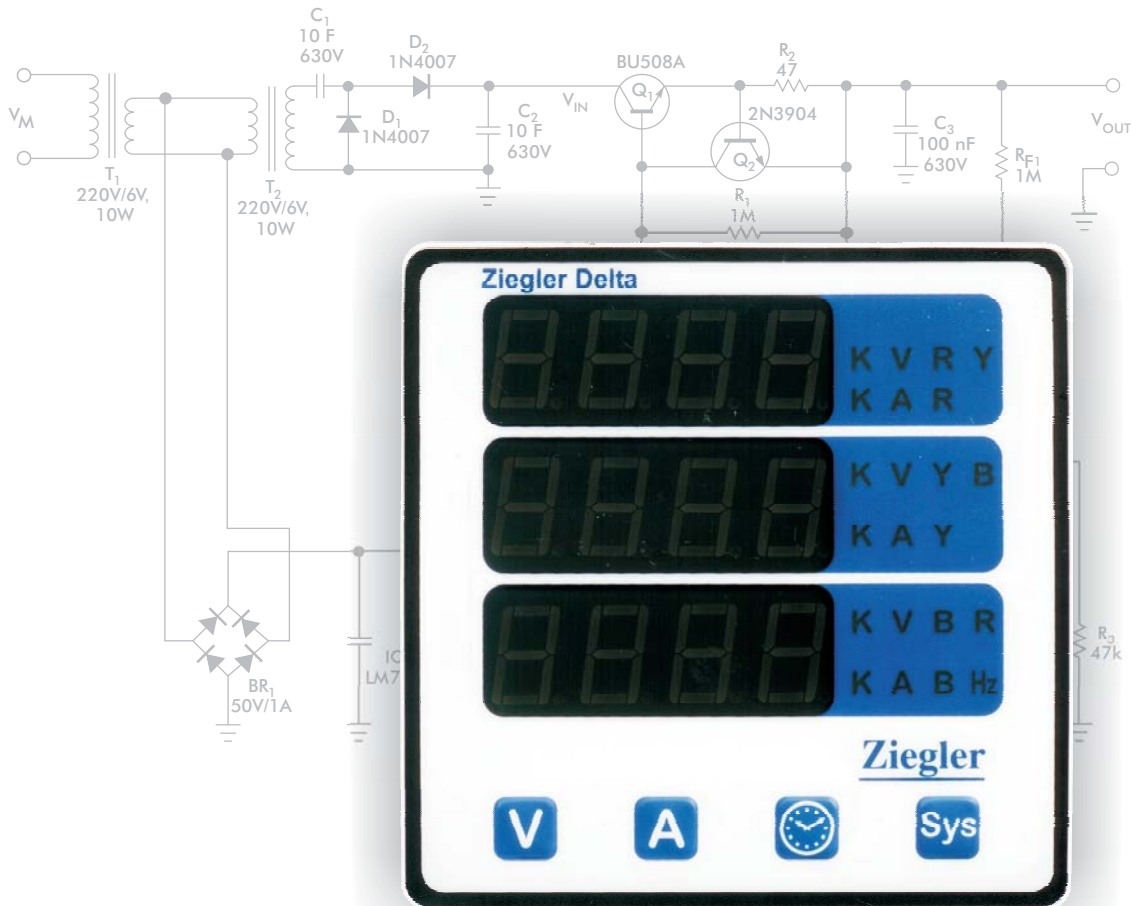

© Ziegler Instruments Order No. Ziegler Delta Data sheet-E1.R0-920502-30-2013-EN

Application

Ziegler Delta measures important electrical parameters in 3 phase 4 Wire and 3 phase 3 Wire Network & replaces the multiple analog panel meters. It measures electrical parameters like AC Voltage, AC Current, Frequency & many more.

Salient Features

- Fast & Easy Installation on panel with self clicking.
- True RMS measurement.
- Limit Switch (optional).(Available only in 3 Line Display)
- 3 Line 4 Digits ultra bright LED Display (up to 9999).
- On site Programmable CT/PT Ratios.
- User selectable CT Secondary 1A/5A.
- User selectable PT Secondary from 100 VLL to 500 VLL.
- User selectable 3ph3wire / 3ph4wire / single phase Network.
- Wide auxillary Power Supply which can accept any input between 40V – 300V AC/DC.
- Storage of MIN / MAX values.
- Measurement & Display of RPM, Run hours, On hours & No. of Interrupts.
- Load Manager for indicating percentage of system current. (available in single line only)

Products Features

On site programmable PT/CT ratios:

It is possible to program primary of external potential Transformer (PT), primary of external Current Transformer (CT) on site via front panel keys by entering into Programming mode.

User selectable CT Secondary 5A/1A

The secondary of external Current Transformer (CT) can be programmed on site to either 5A or 1A using front panel keys.

User selectable PT Secondary

The secondary of external Potential Transformer (PT) can be programmed on site from 100VLL to 500VLL using front panel keys.

User selectable 3 phase 3Wire or 4Wire or Single phase Network

User can program on site the network connection as either 3 Phase 3 Wire or 4 Wire or single phase network using front panel keys.

In case of self powered Ziegler Delta only either 3 Phase 4 wire or single phase network are available.

Storage of parameters possible

The instrument stores minimum and maximum values for System Voltage, System Current, Run Hour, ON Hour & number of Interrupts. Every 60 sec stored values are updated.

Four function keys

Using the four function key, it is possible to go desired parameter screen instantly.

Onsite selection of Auto scroll / Fixed Screen

User can set the display in auto scrolling mode or fixed screen mode using front panel keys.

Low back depth

The instrument has very low back depth (behind the panel) of less than 55mm (without output options).

True RMS measurement

The instrument measures distorted waveform up to 15th Harmonic.

RPM Measurement: The instrument display Rotation per minutes for generator applications. Number of poles can be set on site depending upon application requirement.

Optional Limit switch (Relay)

The instrument will trip the relay if the programmed parameter exceeds the programmed Trip Limits.

3 line 4 digits LED display

Simultaneous display of 3 Parameters.

Enclosure Protection for dust and water:

Conforms to IP 50 (for front face) or IP 65 option (for front with seal) & IP 20 (for back) & as per IEC60529.

EMC Compatibility

Compliance to International standard IEC 61326.

- Interference Emission IEC 61326-1 : 2005, Class A
- Interference Immunity IEC 61326-1 : 2005
- Electrostatic discharge IEC 61000-4-2 -- 4kV/8kV contact/air. (ESD)
- EM Field IEC 61000-4-3 -- 10 V/m (80 MHz to 1 GHz)
 - 3 V/m (1.4 Ghz to 2 GHz)
 - 1 V/m (2 GHz to 2.7 GHz)
- Burst IEC 61000-4-4 -- 2 kV (5/50 ns, 5 kHz)
- Surge IEC 61000-4-5 -- 1 kVLL / 2 kVLN.
- Conducted RF IEC 61000-4-5 -- 3 V (150 kHz to 80 MHz)
- Rated Power Frequency magnetic Field IEC 61000-4-8 -- 30 A/m
- Voltage dip IEC 61000-4-11 -- 0% during 1 cycle.
 - 40% during 10/12 cycles.
 - 70% during 25/30 cycles.
- Short interruptions IEC 61000-4-11 --
 - 0% during 25/30 cycles.
 - 25 cycles for 50 Hz test.
 - 30 cycles for 60 Hz test.

Technical Specifications

Input Voltage

Nominal input voltage (AC RMS)	Phase –Neutral 290V L-N , Line-Line 500V L-L
Max continuous input voltage	120% of rated value
Nominal input voltage burden	> 0.3 VA approx. per phase (For external auxiliary meter)
System PT secondary values	100VLL to 500VLL programmable on site.
System PT primary values	100VLL to 692kVLL programmable on site.

Input Current

Nominal input current	5A AC RMS
System CT secondary values	1A & 5A programmable on site.
System CT primary values	From 1A up to 9999A (for 1 or 5 Amp)
Max continuous input current	120% of rated value
Nominal input current burden	> 0.2 VA approx. per phase

Auxiliary Supply

External Aux	40 V – 300V AC-DC (± 5 %)
Self powered	Input voltage range from 80% to 100% of Rated value. (Self powered meter is available only in 3Phase 4 Wire and Single Phase network.) Auxiliary input is derived from Phase 1 (R phase)

Frequency range

VA burden	45 to 65 Hz 3 VA Approx.
-----------	-----------------------------

Overload Withstand

Voltage	2 x rated value for 1 second, repeated 10 times at 10 second intervals
Current	20x rated value for 1 second, repeated 5 times at 5 min intervals

© Ziegler Instruments Order No. Ziegler Delta Data sheet-E1.R0-920502-30-2013-EN

Technical Specifications

Operating Measuring Ranges

Voltage Range With External Aux	10... 120% of rated value
Voltage Range With Self Power	80... 120% of rated value
Current Range	10 ... 120% of rated value
Frequency	45...65 Hz

Reference conditions for Accuracy

Reference temperature	23°C +/- 2°C
Input waveform	Sinusoidal (distortion factor 0.005)
Input frequency	50 or 60 Hz ±2%
Auxiliary supply voltage	Rated Value ±1%
Auxiliary supply frequency	Rated Value ±1%

Accuracy

Voltage	±1.0% of range (20... 100% of Nominal value)
Current	±1.0% of range (10... 100% of Nominal value)
Frequency	0.5% of mid frequency

Influence of Variations

Temperature coefficient :	
(for rated value range of use (0...50°C))	0.025%/°C for Voltage
0.05%/°C for Current	

Limit Switch (Relay)

Switching Voltage & Current for Relay	240 VDC ,5 A (1NO+1NC)
---------------------------------------	------------------------

Applicable Standards

EMC	IEC 61326-1: 2005
Safety	IEC 61010-1-2001 , Permanently connected use
IP for water & dust	IEC60529

Safety

Pollution degree:	2
Installation category	III
High Voltage Test	3.3 kV AC, 50Hz for 1 minute between Aux. and measuring inputs

Environmental

Operating temperature	0 to +50°C
Storage temperature	-25°C to +70°C
Relative humidity	0... 90% non condensing
Warm up time	Minimum 3 minute
Shock	15g in 3 planes
Vibration	10... 55 Hz, 0.15mm amplitude


Enclosure

Front	IP 50.
Front with seal (Option)	IP 65.
Back	IP 20.

Technical Specifications:

Dimensions and Weights

Bezel size	96 mm x 96 mm DIN 43 718.
Panel cut-out	92 +0.8 mm x 92 + 0.8 mm.
Overall depth	55 mm (without output options) 62 mm (with output options).
Panel Thickness	1 - 3 mm for self clicking, 1 – 6 mm for swivel screws.
Weight	320 gm. Approx (with output options)..
Load Manager	For System Current

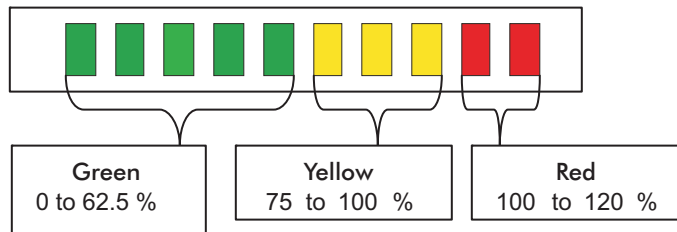

Electrical Parameters


Sr No	Parameter	3 Phase 4 Wire	3 Phase 3 Wire	1 Phase 2 Wire
1	System Volts	✓	✓	✓
2	System Current	✓	✓	✓
3	Frequency	✓	✓	✓
4	Volts R-N	✓	✗	✓
5	Volts Y-N	✓	✗	✗
6	Volts B-N	✓	✗	✗
7	Volts R-Y	✓	✓	✗
8	Volts Y-B	✓	✓	✗
9	Volts B-R	✓	✓	✗
10	Current R	✓	✓	✓
11	Current Y	✓	✓	✗
12	Current B	✓	✓	✗
13	RPM	✓	✓	✓
14	Max (System Voltage / System Current)	✓	✓	✓
15	Min (System Voltage / System Current)	✓	✓	✓
16	Hour Run	✓	✓	✓
17	ON Hour	✓	✓	✓
18	Number of auxiliary interrupt	✓	✓	✓

Electrical Connections

	Self Powered Aux	External Powered Aux
3 Phase 4 Wire Unbalanced Load		
3 Phase 3 Wire Unbalanced Load	Not Applicable	
1 Phase 2 Wire		

*Note: For Measurement of parameters, Voltage must be present between terminal 2 & 11 for single phase or 3 phase 4 wire network and between terminal 2 & 5 or 2 & 8 for 3 phase 3 wire network.



Rear Connection

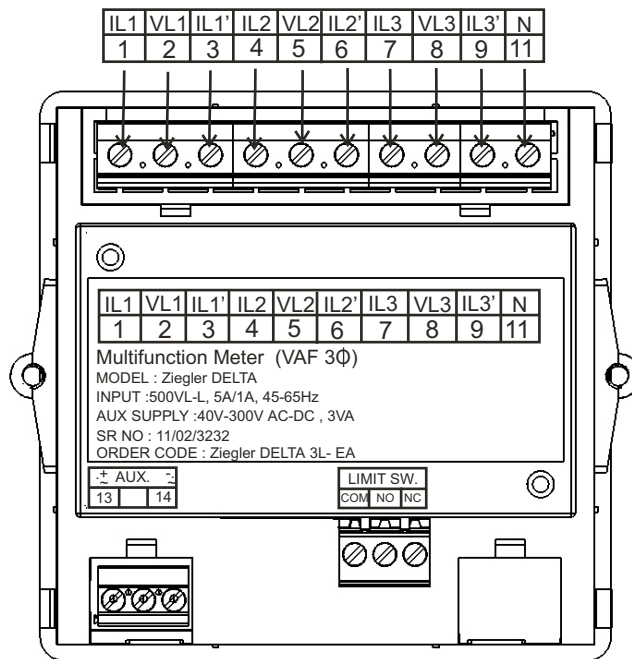



© Ziegler Instruments Order No. Ziegler Delta Data sheet-E1,R0-920502-30-2013-EN

Installation



Easy Clip in Installation on Panel.

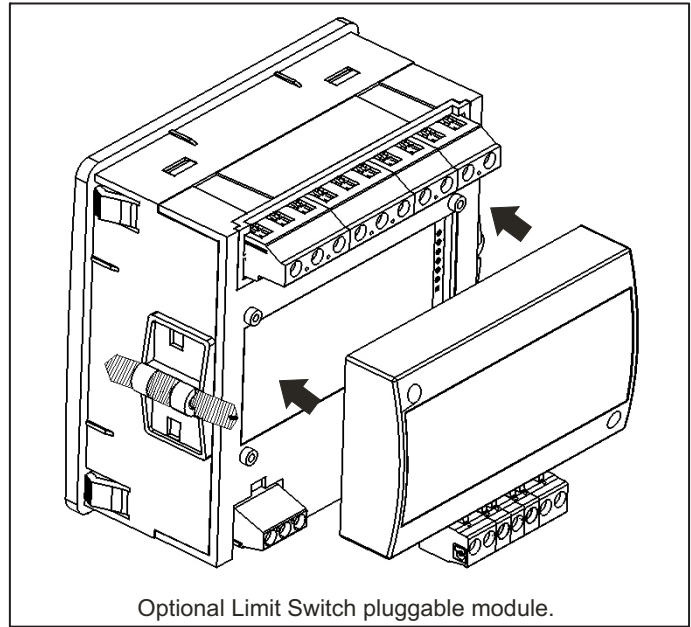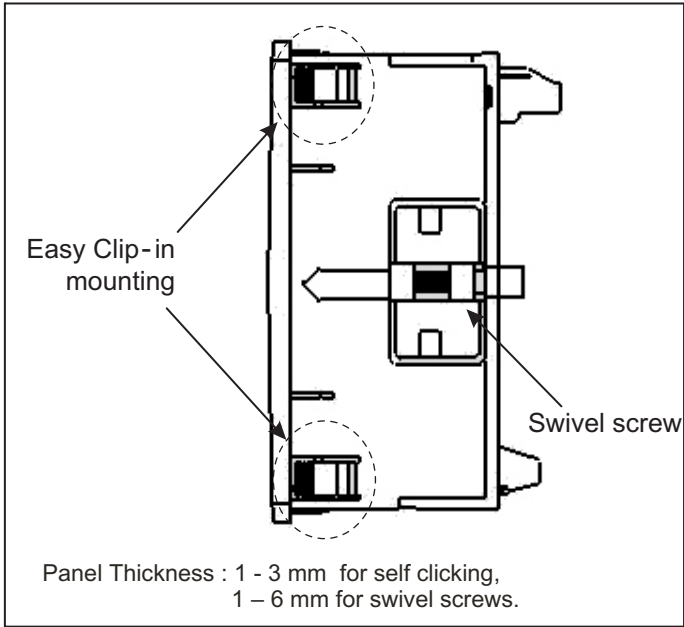

Dimension Details:

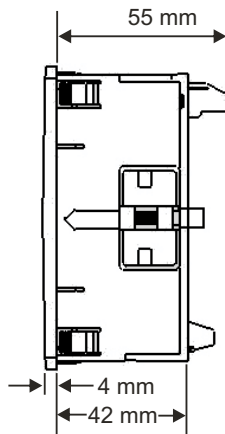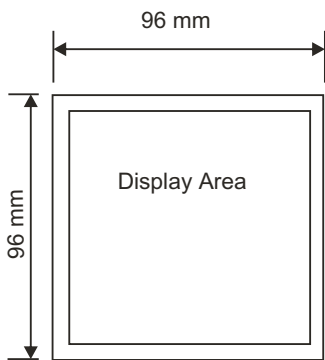

With optional Limit switch.

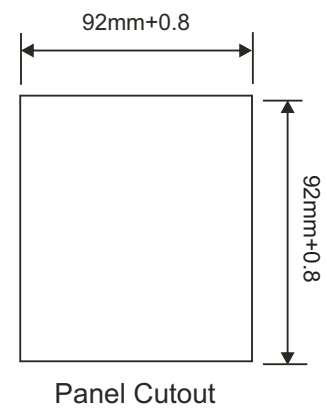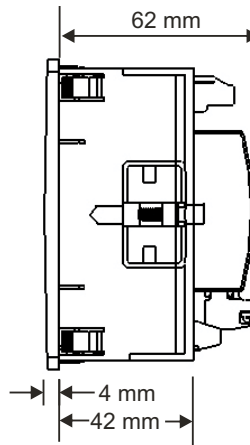

Ordering information	Ordering Code
	Ziegler Delta
Display Type	
3 Line	3L
1 Line (20mm display with alphanumeric display)	1L
Auxiliary Supply	
Self Aux*	SA
External Aux (40 V – 300V AC-DC)	EA
# Limit switch (Relay) - Optional	
With Limit switch	LS
Without Limit switch	Z

Available only in three line Display model

Order Code Example:

Ziegler Delta– 3L –EA – LS

Ziegler Delta, Three line 4Digit display, external aux (40V – 300V AC-DC),With Limit Switch

*NOTE: Self Auxiliary meter is available only in 3Phase 4 Wire and Single Phase network.
Auxiliary input is derived from Phase 1 (R phase).
In case of external auxiliary meter all three networks are available
(3Phase 4Wire / 3Phase 3Wire / Single Phase)

ZIEGLER INSTRUMENTS

Schnepfenreuther Weg 6, D-90425 Nürnberg, Germany.

TEL. | (+49)(911) 38 492 45 E-MAIL | info@ziegler-instruments.com
FAX. | (+49)(911) 32 26 212 WEBSITE | www.ziegler-instruments.com

