

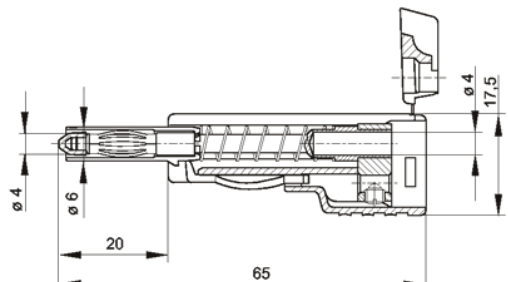


datasheet for SLS 200
 article number: 932153100



| | |
|----------------------------------|--|
| product description: | order number: 932 153-100 |
| description: | Touch protected plug to assemble with screw terminals and plug further opportunity for cables up to 2.5mm ² . Insulated by latching and sprung insulating sleeve, to be released by pressure on the lateral locking spring. plug with contact spring, 4mm diameter. |
| typ: | SLS 200 schwarz/black |
| system: | 4mm sliding sleeve system |
| order number: | 932 153-100 |
| color |  |
| other color versions: |  |
| technical data | |
| pin dimensions | 4mm with laminated spring |
| type of contact: | spring loaded pin |
| type of termination: | screw |
| rated voltage: | DC 60V |
| rated current: | 30A |
| contact resistance: | 5mOhm |
| material | |
| contact material: | copper beryllium |
| contact surface material: | nickel |
| housing material: | PP |
| environmental conditions: | |
| temperature range: | -25°C to + 80°C |
| drawing | |
| |  |