

## Ø 4 mm-Sicherheits-Programm Ø 4 mm Safety Programme

<b>S. 104</b>	Sicherheits-Federkorbstecker	Safety lamella-basket plugs
<b>S. 106</b>	Sicherheits-Buchsen	Safety sockets
<b>S. 127</b>	Sicherheits-Kupplungen	Safety couplers
<b>S. 128</b>	Sicherheits-Adapter	Safety adapters
<b>S. 129</b>	Sicherheits-Kurzschlussstecker	Safety connecting plugs
<b>S. 130</b>	Sicherheits-Leitungen	Safety leads
<b>S. 139</b>	Sicherheits-Prüfspitzen	Safety test probes
<b>S. 144</b>	Sicherheits-Prüfspitzenleitungen	Safety test leads
<b>S. 149</b>	Sicherheits-Klemmprüfspitzen	Safety pincer clips
<b>S. 150</b>	Sicherheits-Abgreifklemmen	Safety crocodile clips
<b>S. 152</b>	Sicherheits-Schnelldruckklemmen	Safety quick-release terminals
<b>S. 156</b>	CAT IV Produkte	CAT IV products



**Small Fully Insulated Crocodile Clip**



**SAK 2675**

Schuetzinger confirm that the product(s) listed have been designed, manufactured and tested to and are therefore fully compliant to:


**IEC61010-031:2002 (First Edition) + Amd. 1:2008.**

Together with the corresponding UL and CSA Standards, and are subject of a CB Scheme report. All products marked as per IEC requirements. UL and CSA marking upon request.

All testing carried out by independent third party test house and CB Test Laboratory,

**MET Laboratories Inc.** Baltimore MD 21230 USA

The product(s) also meet the requirements of the Low Voltage Directive and where applicable comply with HSE GS.38.

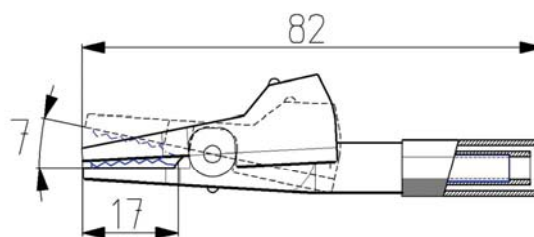

General information		
Order No.	SAK 2675/ ..(colour) contact parts nickel-plated	SAK 2675 / ..(colour) contact parts nickel-plated
colours	black, red, blue, yellow, green, green,white	
Technical data		
Features	Accepts all standard 4mm plugs	
IEC 61010 Rating.		
Measurement Category.	300V CAT II	
Current Rating.	10 Amp	
Insultion Category.	Double/Reinforced.	
Pollution Degree.	Two (2)	