


## Ø 4 mm-Sicherheits-Programm Ø 4 mm Safety Programme

<b>S. 104</b>	Sicherheits-Federkorbstecker	Safety lamella-basket plugs
<b>S. 106</b>	Sicherheits-Buchsen	Safety sockets
<b>S. 127</b>	Sicherheits-Kupplungen	Safety couplers
<b>S. 128</b>	Sicherheits-Adapter	Safety adapters
<b>S. 129</b>	Sicherheits-Kurzschlussstecker	Safety connecting plugs
<b>S. 130</b>	Sicherheits-Leitungen	Safety leads
<b>S. 139</b>	Sicherheits-Prüfspitzen	Safety test probes
<b>S. 144</b>	Sicherheits-Prüfspitzenleitungen	Safety test leads
<b>S. 149</b>	Sicherheits-Klemmprüfspitzen	Safety pincer clips
<b>S. 150</b>	Sicherheits-Abgreifklemmen	Safety crocodile clips
<b>S. 152</b>	Sicherheits-Schnelldruckklemmen	Safety quick-release terminals
<b>S. 156</b>	CAT IV Produkte	CAT IV products

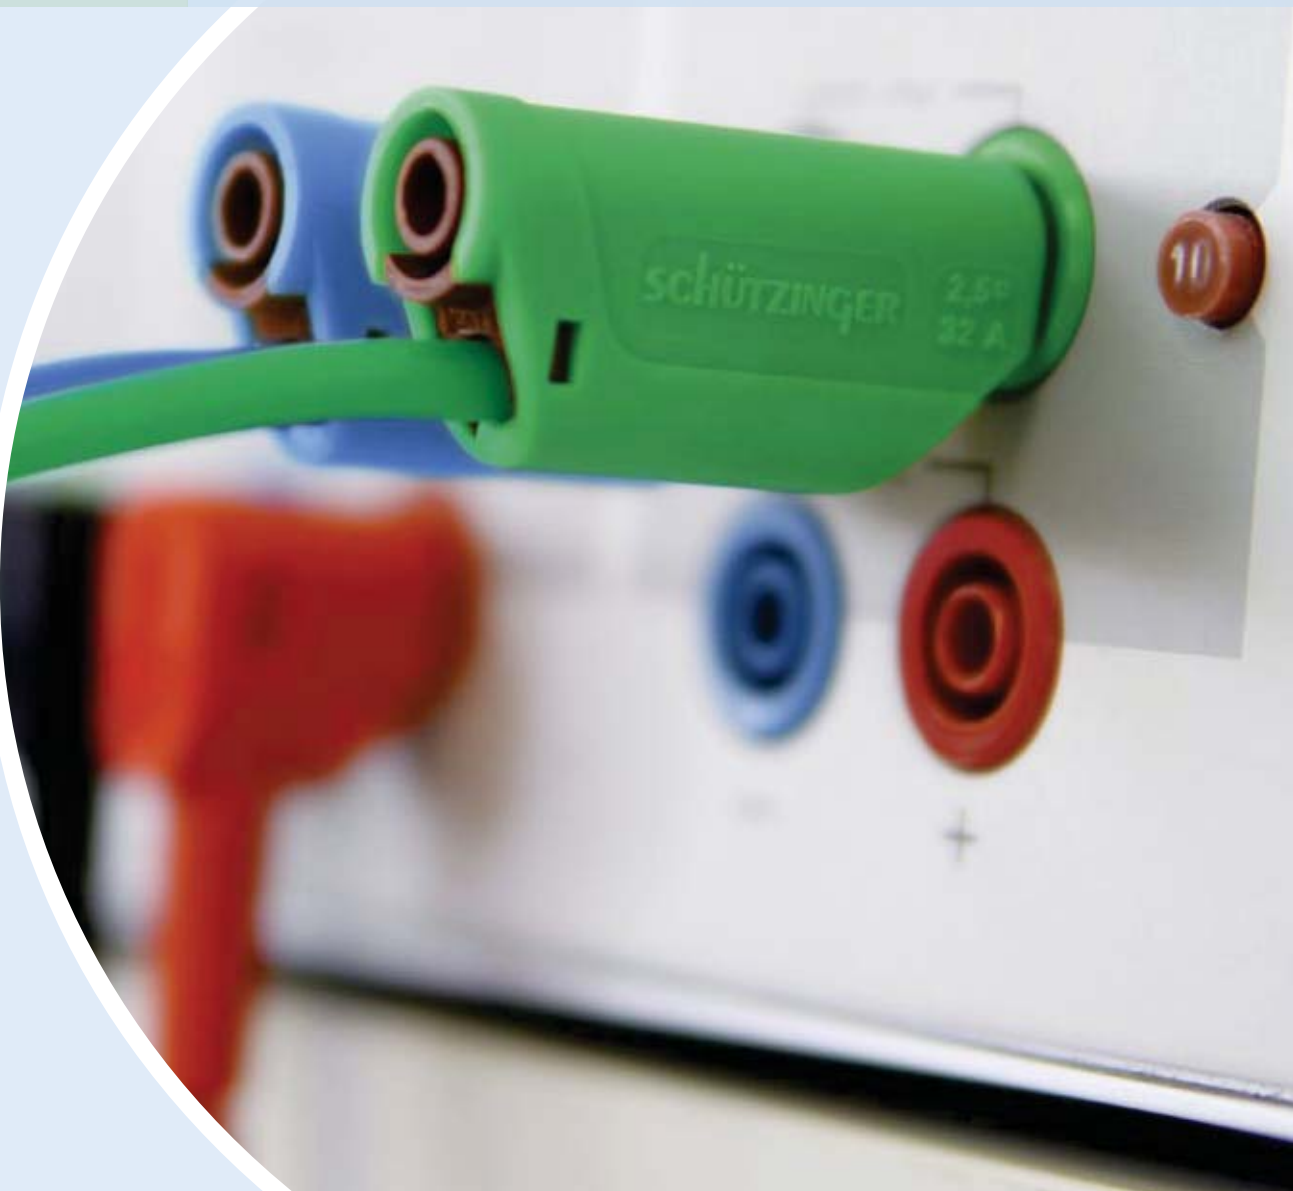

## Flanged Fully Insulated Crocodile Clip

**SAK 2492**



Schuetzinger confirm that the product(s) listed have been designed, manufactured and tested to and are therefore fully compliant to:


**IEC61010-031:2002 (First Edition) + Amd. 1:2008.**

Together with the corresponding UL and CSA Standards, and are subject of a CB Scheme report. All products marked as per IEC requirements. UL and CSA marking upon request.

All testing carried out by independent third party test house and CB Test Laboratory,

**MET Laboratories Inc.** Baltimore MD 21230 USA

The product(s) also meet the requirements of the Low Voltage Directive and where applicable comply with HSE GS.38.

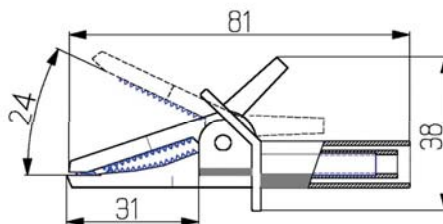

General information	
Order No.	<b>SAK 2492 \</b> ..(colour) contact parts nickel-plated
colours	black, red, blue, yellow, green, White
Technical data	
Features	Accept all standard 4mm plugs
IEC 61010 Rating.	
Measurement Category	600V CAT III/1000V CAT II
Current Rating	20 Amp
Insulation Category.	Double / Reinforced
Pollution Degree.	Two(2)