

Ø 4 mm-Sicherheits-Programm Ø 4 mm Safety Programme

S. 104	Sicherheits-Federkorbstecker	Safety lamella-basket plugs
S. 106	Sicherheits-Buchsen	Safety sockets
S. 127	Sicherheits-Kupplungen	Safety couplers
S. 128	Sicherheits-Adapter	Safety adapters
S. 129	Sicherheits-Kurzschlussstecker	Safety connecting plugs
S. 130	Sicherheits-Leitungen	Safety leads
S. 139	Sicherheits-Prüfspitzen	Safety test probes
S. 144	Sicherheits-Prüfspitzenleitungen	Safety test leads
S. 149	Sicherheits-Klemmprüfspitzen	Safety pincer clips
S. 150	Sicherheits-Abgreifklemmen	Safety crocodile clips
S. 152	Sicherheits-Schnelldruckklemmen	Safety quick-release terminals
S. 156	CAT IV Produkte	CAT IV products





121026

Shutzinger confirm that the product(s) listed have been designed, manufactured and tested to and are therefore fully compliant to:


IEC61010-031:2002 (First Edition) + Amd. 1:2008.

Together with the corresponding UL and CSA Standards, and are subject of a CB Scheme report. All products marked as per IEC requirements. UL and CSA marking upon request.

All testing carried out by independent third party test house and CB Test Laboratory,

MET Laboratories Inc. Baltimore MD 21230 USA

The product(s) also meet the requirements of the Low Voltage Directive and where applicable comply with HSE GS.38.

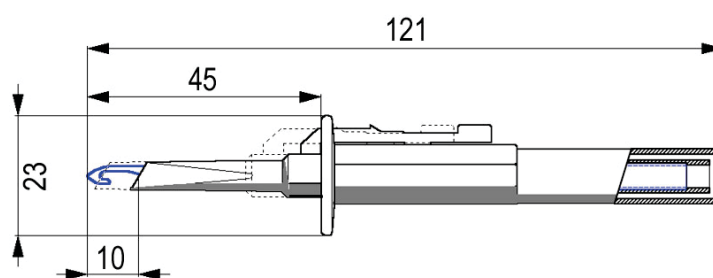

General information		
Order No. ¹⁾	121026 / ..(colour) contact parts nickel-plated	121026 / ..(colour) contact parts nickel-plated
colours	black, red	
Technical data		
Features	Accepts all standard 4mm plugs	
IEC 61010 Rating.		
Measurement Category.	1000V CAT III/600V CAT IV	
Current Rating.	20 Amp	
Insulation Category. Pollution Degree.	Double/Reinforced. Two (2)	