

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 e-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM20 2DY, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 e-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13032, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 e-mail: info@jumo.us
 Internet: www.jumo.us



Platinum-chip temperature sensors in cylindrical style to EN 60 751

- for temperatures from -70 to +300°C
- standardized nominal values and tolerances
- with the nominal values 100, 500 and 1000Ω
- readily adaptable to protection tubes or fittings
- high mechanical strength

Introduction


This cylindrical style incorporates a platinum-chip temperature sensor which is inserted into a ceramic sleeve that is open at one end. Accordingly, this style also belongs to the category of temperature sensors which are manufactured using thin-film technology. After inserting the platinum-chip temperature sensor, the opening of the ceramic sleeve is hermetically sealed by fusing a glass paste.

JUMO temperature sensors in cylindrical style are a cost-effective alternative to wirewound ceramic temperature sensors. Thanks to the cylindrical body, good thermal adaptation to the internal wall of protection tubes can be achieved, which is otherwise only provided by wirewound glass or ceramic temperature sensors.


The application temperature ranges from -70 to +300°C.

These sensors are frequently used in equipment and machinery construction.

PCR style

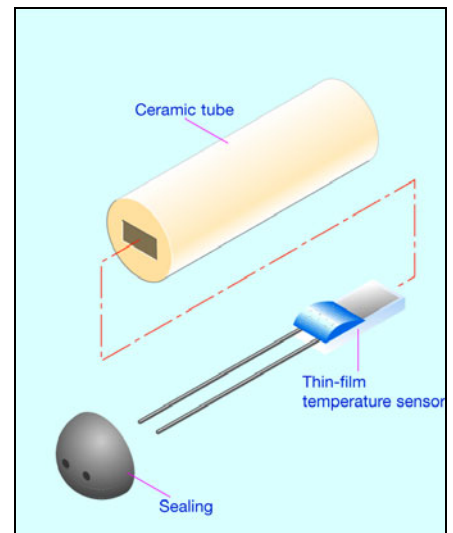

Technical publication

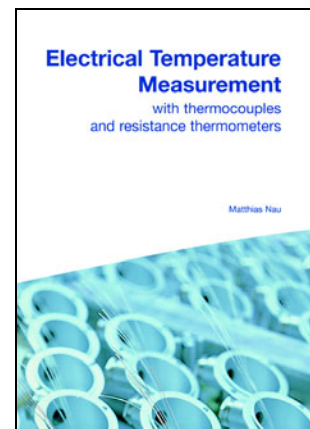

This revised edition takes account of altered standards and recent developments. The new chapter "Measurement uncertainty" incorporates the basic concept of the internationally recognized ISO guideline "Guide to the expression of uncertainty in measurement" (abbreviated: GUM). In addition, the chapter on explosion protection for thermometers has been updated in view of the European Directive 94/9/EC, which has been in force since 1st July 2003.

August 2002
 Publication FAS 146
 Sales No. 90/00085081
 ISBN: 978-3-935742-07-8

JUMO platinum temperature sensors

Construction and application of platinum temperature sensors	Data Sheet 90.6000
Platinum-glass temperature sensors	Data Sheet 90.6021
Platinum-ceramic temperature sensors	Data Sheet 90.6022
Platinum-foil temperature sensors	Data Sheet 90.6023
Platinum-glass temperature sensors with glass extension	Data Sheet 90.6024
Platinum-chip temperature sensors with connecting wires	Data Sheet 90.6121
Platinum-chip temperature sensors on epoxy card	Data Sheet 90.6122
Platinum-chip temperature sensors with terminal clamps	Data Sheet 90.6123
Platinum-chip temperature sensors in cylindrical style	Data Sheet 90.6124
Platinum-chip temperature sensors in SMD style	Data Sheet 90.6125

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 e-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM20 2DY, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 e-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13032, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 e-mail: info@jumo.us
 Internet: www.jumo.us



Platinum-chip temperature sensors in cylindrical style to EN 60 751


Brief description

Platinum-chip temperature sensors in cylindrical style are a cost-effective alternative to wirewound ceramic temperature sensors, provided that the application temperature range of -70 to +300°C is sufficient. The temperature sensors have particularly close diameter tolerances, which greatly facilitates subsequent manufacturing processes, in equipment construction, for example. In addition, the cylindrical style of the temperature sensor enables good thermal contact with protection tubes.

PCR style temperature sensors are also more resistant to mechanical stress than bare platinum-chip sensors, which makes them particularly suitable for embedding or glueing into various compounds.

They are frequently used in analytical and medical equipment, and in machinery and plant construction.

PCR style

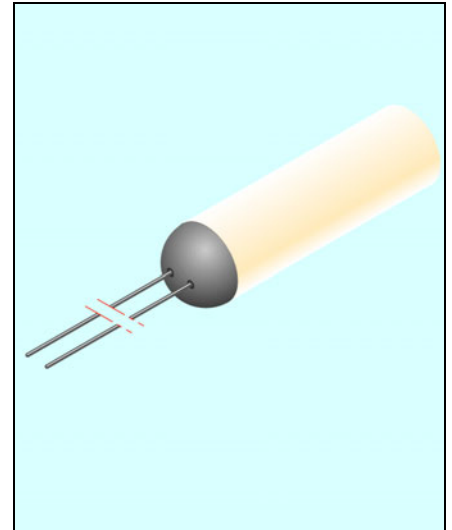


Temperature sensors in blister belt packaging

Temperature sensor				Connecting wire				Sales No. for tolerance class		
Type	R ₀ /Ω	D	L	Material	D1	L1	R _L in mΩ/mm	1/3 DIN B	A	B
PCR 1.3815.1	1x100	3.8	15	Pt-Ni	0.20	8	2.8	90/00049128	-	90/00383870
PCR 1.3815.5	1x500	3.8	15	Pt-Ni	0.20	8	2.8	-	-	90/00049033
PCR 1.3815.10	1x1000	3.8	15	Pt-Ni	0.20	8	2.8	-	-	90/00049130
PCR 1.4815.1	1x100	4.8	15	Pt-Ni	0.20	8	2.8	90/00047254	-	90/00044914
PCR 1.4815.5	1x500	4.8	15	Pt-Ni	0.20	8	2.8	-	-	90/00044915
PCR 1.4815.10	1x1000	4.8	15	Pt-Ni	0.20	8	2.8	-	-	90/00044916

Dim. tolerances: ΔD = +0/-0.3 / ΔL = +0/-2 / ΔD1 = ±0.01 / ΔL1 = ±1
 Dimensions in mm.

For a definition of the tolerance classes, see Data Sheet 90.6000

Dimensional drawing

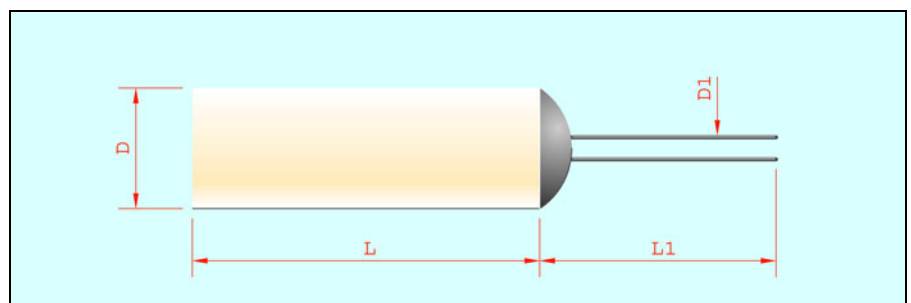

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 e-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM20 2DY, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 e-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13032, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 e-mail: info@jumo.us
 Internet: www.jumo.us



Technical data

Standard	EN 60 751		
Temperature coefficient	$\alpha = 3.850 \times 10^{-3} \text{ } ^\circ\text{C}^{-1}$ (between 0 and 100 °C)		
Temperature range	-70 to +300 °C		
Tolerance	Temperature validity range Class 1/3 DIN B:	-50 to +200 °C	
	Temperature validity range Class B:	-70 to +300 °C	
Measuring current	Pt100	recommended: 1.0 mA	
	Pt500	recommended: 0.7 mA	
	Pt1000	recommended: 0.1 mA	
Maximum current	Pt100	7 mA	
	Pt500	3 mA	
	Pt1000	1 mA	
Operating conditions	Platinum-chip temperature sensors may not be used unprotected in humid ambient conditions or corrosive atmospheres. The user may have to carry out some checks before operation. Please also refer to the Installation Instructions B 90.6121.4 "Notes on the application of platinum-chip temperature sensors."		
Connecting wires	The connecting wires are made from sheathed platinum wire, 0.20mm thick, with a nickel core. The maximum tensile strength is 10N/wire. Any tension on the sensor must not be at an angle of more than 30° to the axis of the sensor. Any unnecessary bending must be avoided as this may result in material fatigue and a break of the connecting wires.		
Measurement point	The nominal value specified refers to the standard connecting wire length L1. The measurement is acquired 2 mm from the open end of the wire. If the wire length is altered, changes in resistance will occur which may result in the tolerance class not being met.		
Long-term stability	max. drift $\leq 0.05 \%$ /year (see Data Sheet 90.6000 for definitions)		
Insulation resistance	$>10 \text{ M}\Omega$ at room temperature		
Vibration strength	see EN 60 751, Section 4.4.2		
Shock resistance	see EN 60 751, Section 4.4.1		
Self-heating	$\Delta t = I^2 \times R \times E$ (see Data Sheet 90.6000 for definitions)		
Packaging	Blister belt		
Storage	In the standard packaging, JUMO temperature sensors, PCR style, can be stored for at least 12 months under normal ambient conditions. It is not permissible to store the sensors in aggressive atmospheres, corrosive media, or in high humidity.		
RoHS conforming	Yes		
REACH conforming	Yes		

Self-heating coefficients and response times

Type	Self-heating coefficient E in °C/mW		Response times in seconds			
	in water (v = 0.2m/sec)	in air (v = 2m/sec)	in water (v = 0.4m/sec)		in air (v = 1 m/sec)	
			t _{0,5}	t _{0,9}	t _{0,5}	t _{0,9}
PCR 1.3815.1	0.05	0.1	2	4.5	23	93
PCR 1.3815.5	0.05	0.1	2	4.5	23	93
PCR 1.3815.10	0.05	0.1	2	4.5	23	93
PCR 1.4815.1	0.05	0.1	3	7.5	47	115
PCR 1.4815.5	0.05	0.1	3	7.5	47	115
PCR 1.4815.10	0.05	0.1	3	7.5	47	115