



# Universal Test System

## Model: L336i



Professional solutions provider for relay testing


[www.relaytest.com](http://www.relaytest.com)

### Sales network



### PONOVO POWER CO., LTD.

2F,4Cell, Tower C, In.Do Mansion,  
No.48A Zhichun Road, Haidian District  
Beijing, PR China (100098)  
Tel. +86 (10) 8275 5151 (reception)  
Tel. +86 (10) 8275 5151 ext.8887  
Fax. +86 (10) 82755257  
[info@relaytest.com](mailto:info@relaytest.com)  
[www.relaytest.com](http://www.relaytest.com)

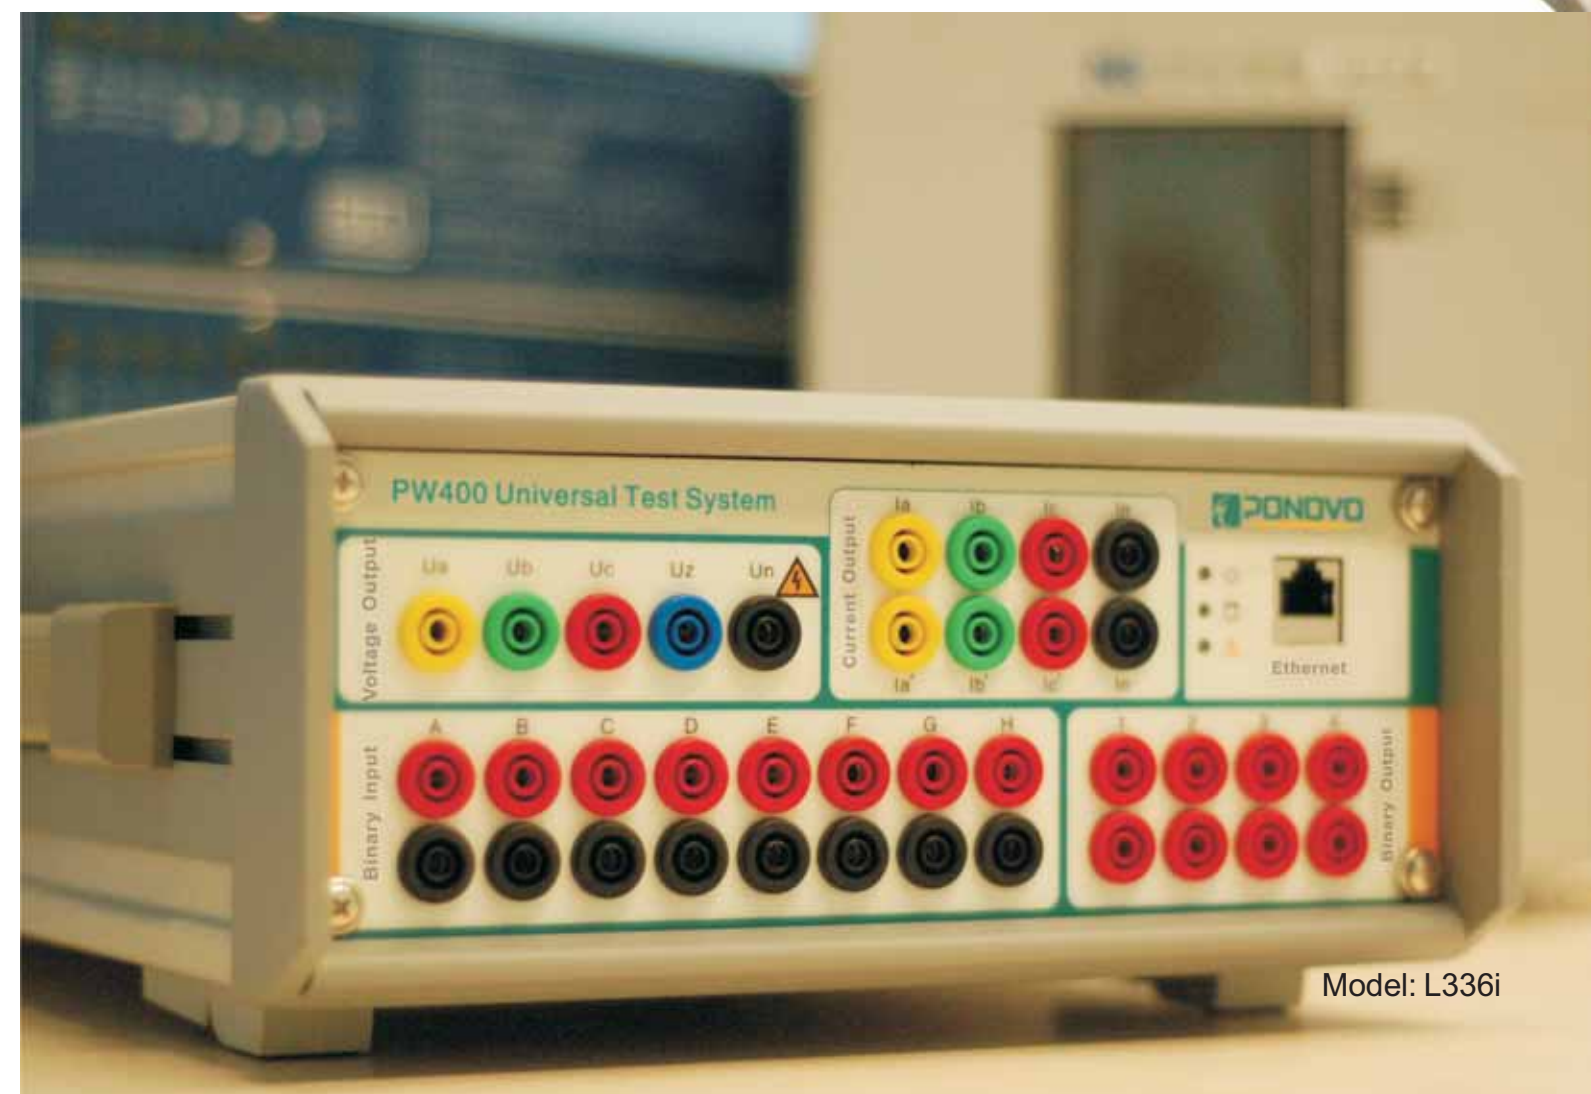

Model: L336i




# New light weight relay testing equipment

We are proud to announce the new L336i relay testing system which is the lightest in weight and the smallest in size in the word so far.

## Features

- Light weight with only 8.8kg, half of the weight of traditional testing system
- Tracing the signal generation with digital technology
- Stable signal output with high accuracy
- Binary inputs with adjustable threshold
- Use LAN port for connecting to external PC
- Internal digital recorder for monitoring and recording test process
- Use powerful PowerTest software with ready test modules, realizing the maximum control flexibility over test process
- Can be upgraded to support the test of IEC61850 compatible relay

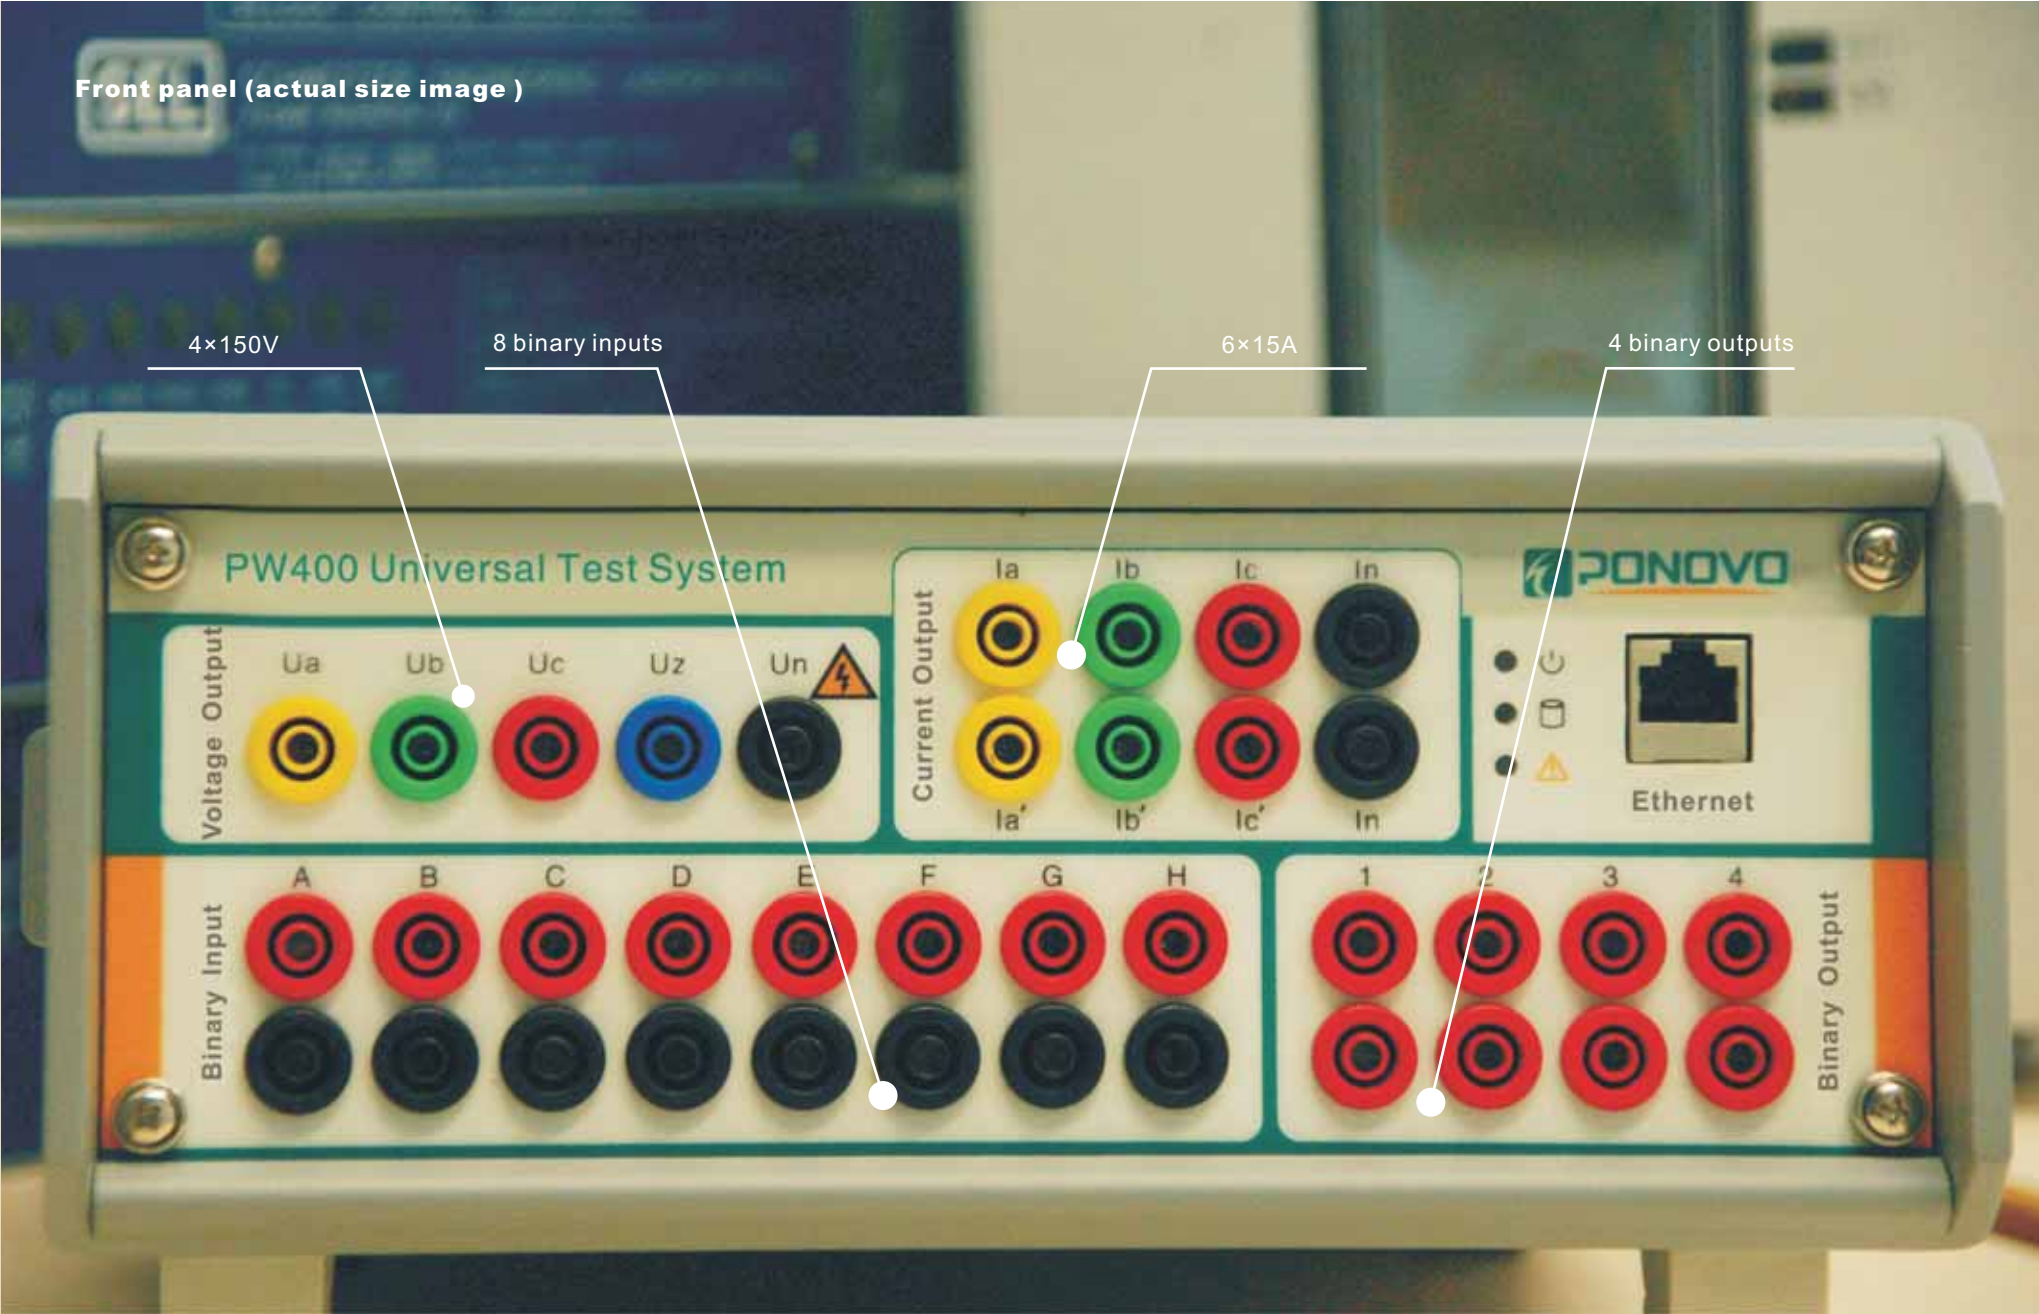

## Applications

- Relay test:** line protection, differential protection, generator protection, line differential, directional relay Time-inversed current relay, auto-reclosing, etc
- Measuring and control device:** synchronizer , df/dt, etc
- System simulation:** playback of COMTRADE format file
- Calibration:** 0.5 Class energy meter, disturbance recorder, indicating meters, etc



Rear side





## Test modules example


### Quick Test

Manual or auto control over all voltage and current sources. All test parameters, such as amplitude, phase, frequency, etc can be set separately.




### Ramp

Linear or pulse ramp can be used for different test applications, such as directional relay, current relay, voltage relay, frequency, etc.

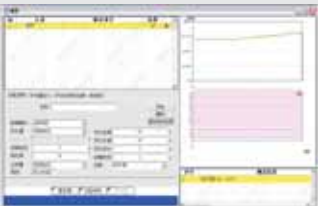


### State sequence

Here we can a sequence of states for special test application. A fault calculation tool is provided to set fault settings easily for each sequence.

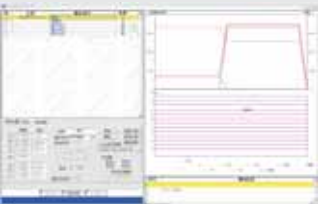


### Distance

The impedance characteristic can be uploaded on to the Z-plane and any points on Z-plane can be checked. Z-T diagram can also be got after test is over.

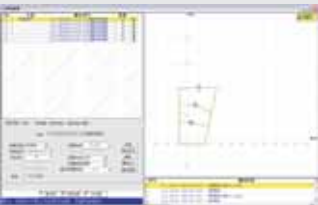


### Auto-recloser

This module makes the check of autoreclosure very easy. The tripping after the second fault can also be checked.

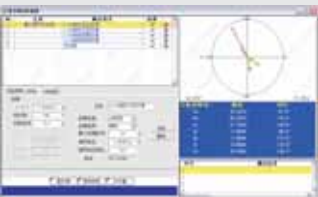


### Underfrequency

Different tests can be done for df/dt relay, including pick up, trip time, df/dt setting, under-voltage or under-current blocking.

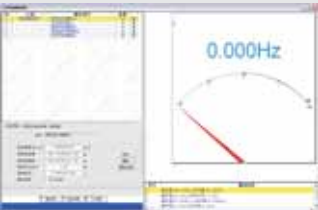


### R/X characteristic sweep

This module is used to map out the characteristic boundary of impedance relay and compare it with the principle characteristic.

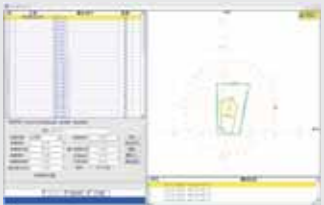


### Inverse time overcurrent

Test can be done based on actual over current characteristic. Assessment will be done automatically after test is over.

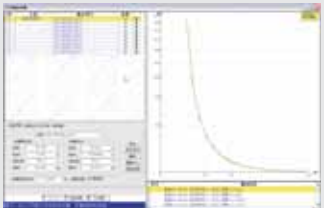


### Differential

This module allows user to test differential relay with 6 currents. Ir/I<sub>d</sub> curve can be defined easily based on relay setting. Harmonic restraint can also be checked.

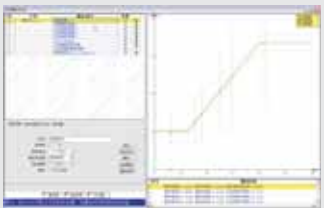


### Synchronizer

This module is used to check the synchronizer relay, including voltage and frequency difference check, leading time and leading angle check, auto-adjusting function, etc.

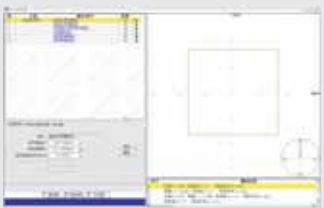

### Power swing

This module provides the tool to observe the relay behavior during dynamic power swing process. Power swing with fault can also be simulated.

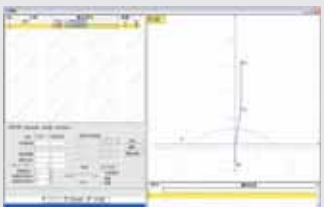


# Technical specifications

## AC Current outputs

Control	Independent control of amplitude, frequency and phase angle
Range	6×15Aor 3×30A
Accuracy	± 1mA (<0.5A), ±0.1% (0.5A~20A) ± 0.2% (20A~30A)
Resolution	1mA (0.1A~10A), 10mA (10A~30A)
Output power	≥ 210VA (at 30A, LN) ≥ 105VA (at 15A, LN)

Output characteristic

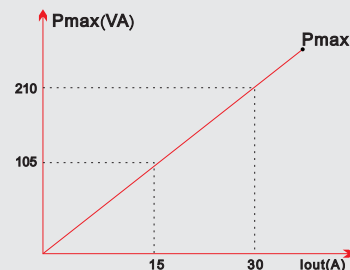


Output response time	<100μs
Distortion (THD%)	≤0.5% (0.5A~Imax)
Frequency range	1Hz ~1kHz
Frequency- Amplitude characteristic	≤± 0.1%~± 0.5% (1Hz~1kHz) continuous (<10A/channel) >70s (<10~20A/channel) >15s(<20~30A/channel)
Output time	
Operation indication	Overload, distortion, open circuit, over heat

## AC Voltage outputs

Control	Independent control of amplitude, frequency and phase angle
Fourth voltage (Uz)	Can be set as zero sequence voltage, line voltage, or any value
Range	4×150V
Accuracy	± 2mV(0.2V~2.5V), ± 0.1%(2.5V ~150V)
Resolution	1mV(0.2V~10V), 10mV(10V~150V)
Output power	≥60VA (at 150V)

Output characteristic

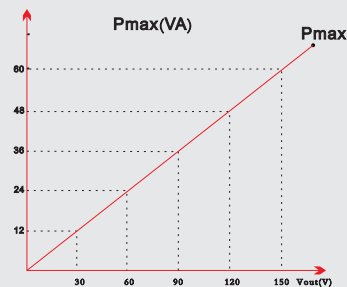

Output response time	<100μs
Distortion (THD%)	≤0.5% (2V~150V)
Frequency range	1Hz ~1kHz
Frequency- Amplitude characteristic	≤± 0.1%~± 0.5% (1Hz~1kHz)
Output time	Continuous at rated output condition
Operation indication	Overload, distortion, short circuit, over heat

## Frequency

Sine signal	1Hz~1000Hz
Accuracy	<1mHz (20 Hz ~65Hz) <10mHz (65 Hz ~450Hz) <20mHz (450 Hz ~1000Hz)
Resolution	0.001Hz
Output characteristic	Can simulate 2 <sup>nd</sup> -20 <sup>th</sup> harmonic or DC

## Phase angle

Range	-360°~+360°
Accuracy	± 0.1°
Resolution	0.001°

## DC current outputs

Range	3×0A~10A
Accuracy	± 5mA (0.2A~1A) ± 0.5% (1A~10A)
Resolution	1mA (0.2A~10A)
Output power	300W (30A 10V)
Operation indication	Overload, distortion, open circuit, over heat

## Synchronization time between current and voltage outputs

≤10 μ s

## Binary inputs

Number	8
Input characteristics	0~400Vdc threshold or potential free
Time resolution	50μs
Max. measuring time	infinite
Debounce/Deglitch time	0~25ms
Counting function	< 3kHz at pulse width>150μs

## Binary output

Number	4
Characteristic	Potential free relay contact (auto detection)
Break capacity ac	Vmax : 250V(AC)/Imax : 0.5A
Break capacity dc	Vmax : 250V(DC)/Imax : 0.5A

## IEC61850 upgrade

Interpretation hardware is in-built. Please contact the supplier for options to activate the IEC61850 software support function

## Power Supply

Input	110-240Vac
Frequency	50/60Hz
Max. current	6.3A

## Others

PC connection	Ethernet, 10M/100M
GPS interface	DB9/TTL
Ground Socket (earth)	4 mm banana socket; front side
Dimension(WXHXD)	256mm × 110mm× 395 mm
Weight	8.8 kg

# Test of IEC61850 compatible relay (optional)

Relay test equipment supplies analog voltage/current signal to relay and the GOOSE message from relay is received and interpreted by relay test equipment.

