


Technical data sheet

Coaxial protection devices for S-UHF connection: Female/female

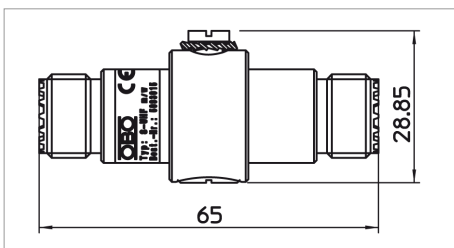


Coaxial data cable protection devices

- Basic protection
- High pulsed current carrying capacity $2 \times 2.5 \text{ kA}$ ($10/350 \mu\text{s}$)
- Simple installation (adapter plug), m = plug/f = female connector
- Various plug combinations
- With UHF connector
- Optimised transmission behaviour
- Including OBO M25 Quick clip for simple installation

Type	Plug-in system	Transmission frequency f	Plug-in system	Pack Units	Weight kg/100 pc.	Art.-No.
S-UHF M/W		0 - 5 GHz		1	7.000	5093023
S-UHF W/W		0 - 5 GHz		1	6.500	5093015

G /pc.

Connection-/Circuit diagram

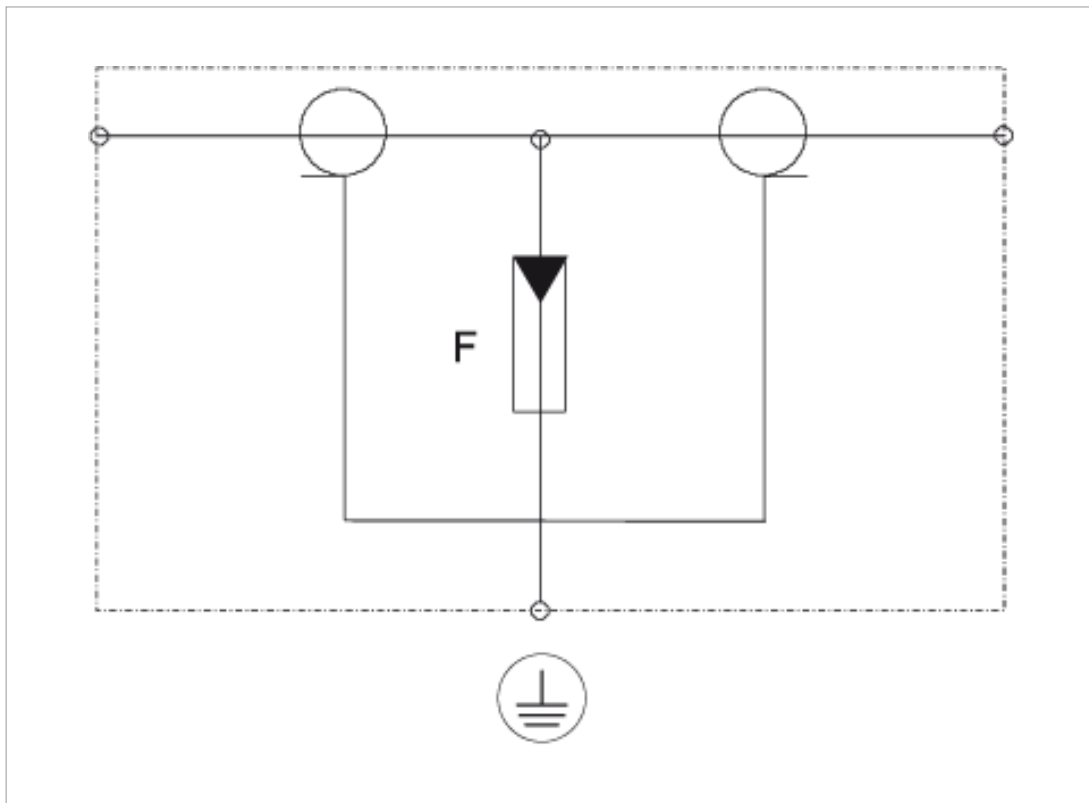

Article number			5093023	5093015
U max AC	U_c AC	V	130	130
LPZ			0?2	0?2
Lightning impulse current (10/350)	I_{imp}	kA	2,5	2,5
Nominal discharge surge current (8/20)	I_n	kA	10	10
Wave resistance	Z_L	?	50	50
Transmission power	P_{max}	W	400	400
Transmission frequency		f	0 - 5 GHz	0 - 5 GHz
Insertion loss	a/dB	dB	3 @ 5 GHz	3 @ 5 GHz
Temperature range	?	°C	-40	-40

Legend



Transition from LPZ 0 to LPZ 2



Communautés Européennes, EC declaration of conformity according to EC directives



Russia, GOST The State Committee for Standards



5-year warranty