

**JUMO GmbH & Co. KG**  
Delivery address: Mackenrodtstraße 14,  
36039 Fulda, Germany  
Postal address: 36035 Fulda, Germany  
Phone: +49 661 6003-0  
Fax: +49 661 6003-607  
e-mail: mail@jumo.net  
Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
JUMO House  
Temple Bank, Riverway  
Harlow, Essex CM20 2DY, UK  
Phone: +44 1279 635533  
Fax: +44 1279 635262  
e-mail: sales@jumo.co.uk  
Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**  
8 Technology Boulevard  
Canastota, NY 13032, USA  
Phone: 315-697-JUMO  
1-800-554-JUMO  
Fax: 315-697-5867  
e-mail: info@jumo.us  
Internet: www.jumo.us



## JUMO Etemp B

### Push-in RTD temperature probe with connection head form B for standard applications


- Temperature range from -50 to +400 °C
- With built-in measuring insert
- As single or double RTD temperature probes
- Terminal head form B or BUZ
- Available with transmitter

#### Brief description

Push-in RTD temperature probes for standard applications are preferentially used for measuring temperatures in liquids and gases. The application areas are, among others, in the air conditioning technology and refrigeration engineering as well as the HVAC and apparatus engineering sector.

The connection head is suitable for ambient temperatures up to +100 °C. In addition to the standard connection head form B, design BUZ is also available.

The measuring insert is normally fitted with a Pt100 temperature sensor according to DIN EN 60751, Class B in 2-wire circuit; versions with Pt500 or Pt1000 temperature sensors can also be supplied, as well as 4-wire circuit connections. A transmitter can be optionally integrated into the connection head.

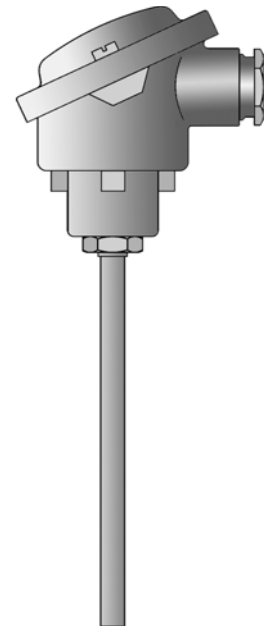

Basic type 902123/10

#### Technical data

<b>Terminal head</b>	Form B DIN EN 50446, die-cast aluminum, M 20x1.5; IP65, ambient temperature -40 to +100 °C Form BUZ, die-cast aluminum, M 20x1.5; IP65, ambient temperature -40 to +100 °C Reduced ambient temperature when using transmitters, data sheet 707030 and 707010
<b>Protection tube</b>	Stainless steel 1.4571, Ø 6 mm, Ø 8 mm
<b>Measuring insert</b>	Pt100 temperature sensor DIN EN 60751, cl. B, 2-wire circuit, built-in
<b>Response times</b>	$t_{0,5} = 5$ s, $t_{0,9} = 14$ s in water 0.4 m/s; Ø 6 mm
<b>Transmitter</b>	Analog transmitter, output 4 to 20 mA, data sheet 707030 Analog transmitter, output 0 to 10 V, data sheet 707030 Programmable transmitter, output 4 to 20 mA/20 to 4 mA, data sheet 707010
<b>Accessories</b>	Process connection, tube screw connection Ø 6 mm, Ø 8 mm Process connection, sheet steel flange Ø 6 mm, Ø 8 mm


**JUMO GmbH & Co. KG**  
 Delivery address: Mackenrodtstraße 14,  
 36039 Fulda, Germany  
 Postal address: 36035 Fulda, Germany  
 Phone: +49 661 6003-0  
 Fax: +49 661 6003-607  
 e-mail: mail@jumo.net  
 Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
 JUMO House  
 Temple Bank, Riverway  
 Harlow, Essex CM20 2DY, UK  
 Phone: +44 1279 635533  
 Fax: +44 1279 635262  
 e-mail: sales@jumo.co.uk  
 Internet: www.jumo.co.uk


**JUMO Process Control, Inc.**  
 8 Technology Boulevard  
 Canastota, NY 13032, USA  
 Phone: 315-697-JUMO  
 1-800-554-JUMO  
 Fax: 315-697-5867  
 e-mail: info@jumo.us  
 Internet: www.jumo.us




## Dimensions

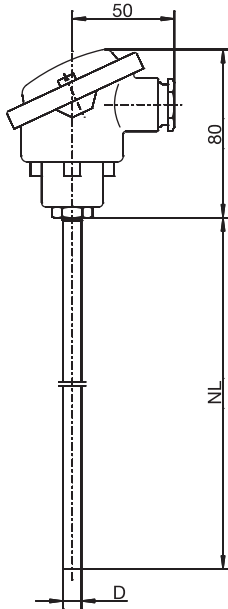


Basic type 902123/10

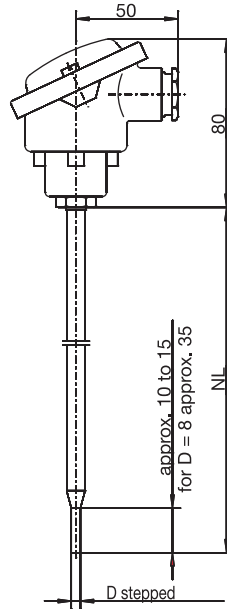

Basic type 902123/11

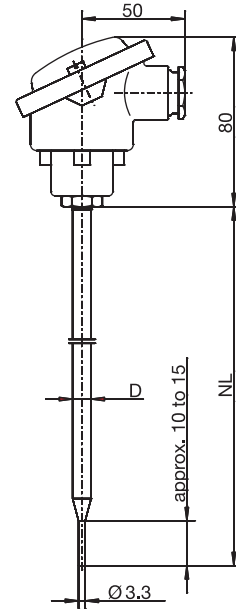

Basic type 902123/31

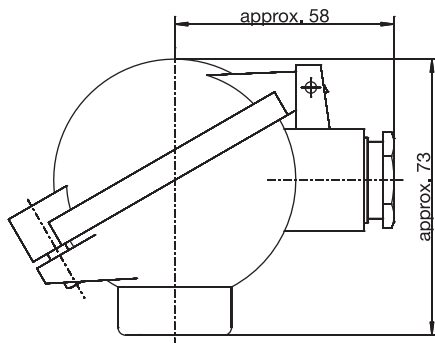

Terminal head form BUZ  
 Extra code 320




**JUMO GmbH & Co. KG**  
 Delivery address: Mackenrodtstraße 14,  
 36039 Fulda, Germany  
 Postal address: 36035 Fulda, Germany  
 Phone: +49 661 6003-0  
 Fax: +49 661 6003-607  
 e-mail: mail@jumo.net  
 Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
 JUMO House  
 Temple Bank, Riverway  
 Harlow, Essex CM20 2DY, UK  
 Phone: +44 1279 635533  
 Fax: +44 1279 635262  
 e-mail: sales@jumo.co.uk  
 Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**  
 8 Technology Boulevard  
 Canastota, NY 13032, USA  
 Phone: 315-697-JUMO  
 1-800-554-JUMO  
 Fax: 315-697-5867  
 e-mail: info@jumo.us  
 Internet: www.jumo.us



## Order details
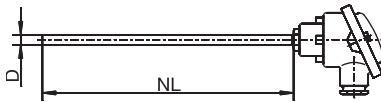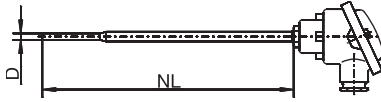
<b>(1) Basic type</b>		
902123/10	JUMO Etemp B Push-in RTD temperature probes with terminal head form B and with continuous sheath	
902123/11	JUMO Etemp B Push-in RTD temperature probes with terminal head form B and with stepped sheath (for Ø 6 mm on Ø 3.8 mm/for Ø 8 mm on Ø 6 mm)	
902123/31	JUMO Etemp B Push-in RTD temperature probes with terminal head form B and with stepped sheath for air measurement	
<b>(2) Operating temperature in °C</b>		
x x x	380	-50 to +200 °C (standard)
x x	386	-50 to +260 °C
x x	402	-50 to +400 °C
x x	647	-20 to +150 °C (only in connection with class B and 1x Pt100 in 2-wire circuit)
<b>(3) Measuring insert</b>		
x x x	1003	1x Pt100 in 2-wire circuit
x x x	1011	1x Pt100 in 4-wire circuit
x x x	2003	2x Pt100 in 2-wire circuit
<b>(4) Tolerance class as per DIN EN 60751</b>		
x x x	1	Class B (standard)
x x x	2	Class A
x x x	3	Class AA (1/3 DIN B)
<b>(5) Sheath diameter D in mm</b>		
x x x	6	Ø 6 mm
x x	8	Ø 8 mm
<b>(6) Nominal length NL in mm (NL 50 to 1000 mm, max. 800 mm for basic types 902123/11 and 902123/31)</b>		
x	50	50 mm
x x x	100	100 mm
x x x	200	200 mm
x x x	...	Please specify in plain text (50 mm steps)
<b>(7) Extra codes</b>		
x x x	000	none
x x x	320	terminal head Form BUZ
x x x	330	1x transmitter, analog output 4 to 20 mA <sup>a</sup> , data sheet 707030
x x x	331	1x programmable transmitter, 4 to 20 mA output <sup>b</sup> , data sheet 707010
x x x	333	1x transmitter, analog output 0 to 10 V <sup>a</sup> , data sheet 707030

<sup>a</sup> Specify measuring range in plain text.

<sup>b</sup> Specify measuring range and output signal in plain text.

**JUMO GmbH & Co. KG**  
 Delivery address: Mackenrodtstraße 14,  
 36039 Fulda, Germany  
 Postal address: 36035 Fulda, Germany  
 Phone: +49 661 6003-0  
 Fax: +49 661 6003-607  
 e-mail: mail@jumo.net  
 Internet: www.jumo.net

**JUMO Instrument Co. Ltd.**  
 JUMO House  
 Temple Bank, Riverway  
 Harlow, Essex CM20 2DY, UK  
 Phone: +44 1279 635533  
 Fax: +44 1279 635262  
 e-mail: sales@jumo.co.uk  
 Internet: www.jumo.co.uk

**JUMO Process Control, Inc.**  
 8 Technology Boulevard  
 Canastota, NY 13032, USA  
 Phone: 315-697-JUMO  
 1-800-554-JUMO  
 Fax: 315-697-5867  
 e-mail: info@jumo.us  
 Internet: www.jumo.us



Order code  (1) -  (2) -  (3) -  (4) -  (5) -  (6) /  (7) , ...<sup>a</sup>  
 Order example 902123/10 - 380 - 1003 - 1 - 6 - 100 / 000

<sup>a</sup> State extra codes one after another, separated by commas.

## Accessories process connection

Article	Sales No.
Tube screw connection G 1/4 for sheath diameter 6 mm	90/00080811
Tube screw connection G 3/8 for sheath diameter 6 mm	90/00057945
Tube screw connection G 3/8 for sheath diameter 8 mm	90/00088927
Tube screw connection G 1/2 for sheath diameter 6 mm	90/00305445
Tube screw connection G 1/2 for sheath diameter 8 mm	90/00371506
Tube screw connection M 10x1 for sheath diameter 6 mm	90/00065416
Tube screw connection 1/2-14NPT for sheath diameter 6 mm	90/00444210
Tube screw connection 1/2-14NPT for sheath diameter 8 mm	90/00361956
Sheet steel flange for sheath diameter 6 mm	90/00065062
Sheet steel flange for sheath diameter 8 mm	90/00068165

For further process connections refer to data sheet 909750.

## Stock versions

(1)	(2)	(3)	(4)	(5)	(6)	(7)	Sales No.:
902123/10	- 380	- 1003	- 1	- 6	- 250	/ 000	90/00542850
902123/10	- 402	- 1003	- 1	- 6	- 250	/ 000	90/00542851
902123/10	- 402	- 1003	- 1	- 6	- 300	/ 000	90/00542852